

**CHROMATOGRAPHY MADE IN GERMANY**



## ELUENT MONITOR S 3128


- ◆ CONDUCTIVITY DETECTOR - 2 INDEPENDENT CHANNELS
- ◆ pH DETECTOR - 2 INDEPENDENT CHANNELS
- ◆ CONDUCTIVITY RANGE 0 - 999 mS/CM
- ◆ PH 1 - 14
- ◆ DESKTOP OR BUILT-IN



# ORDER INFORMATION

## Eluent Monitor **S 3128**


Catalog No	Description	Specifications:
S009720	Eluent Monitor without flowcells	base unit
S009721	Conductivity Flowcell	max. 2
S009722	pH Flowcell with Electrode	max. 2

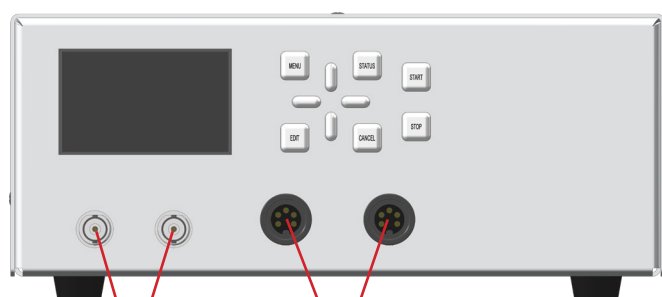


pH Flowcell  
channel 1 & 2

Conductivity  
Flowcell  
channel 1 & 2

Analog signal outputs /  
RS-232

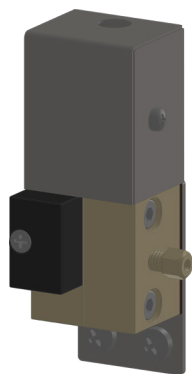

Conductivity  
flowcell

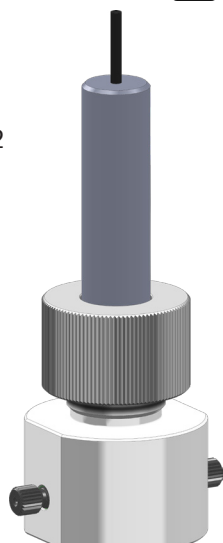

pH Flowcell

### Technical Specifications

Conductivity Channels	2
Conductivity Range	0 - 999 mS/cm
Conductivity Accuracy	<5%
Conductivity Precision	< 2% or <5 µS/cm
pH Channels	2
pH Range	1 - 14
pH Accuracy	± 0.5 pH
pH Precision	± 0.2 pH
Wetted Materials	PEEK, PTFE, Titan, Glas
Signal Output	2x pH, 2x Conductivity
Operation	Manual, RS232, Analog Outputs
Dimensions	255 x 112 x 168 mm
Weight	3.0 kg
Power Supply	100 - 240 V, 50 - 60 Hz or 24 V DC

## Sykam GmbH

Systeme & Komponenten analytischer Meßtechnik

Gewerbering 15  
86922 Eresing  
Germany

Tel.: +49 (8193) 93 82 - 0  
FAX: +49 (8193) 93 82 - 20  
EMail: info@sykam.com  
Web: http://www.sykam.com



All specifications are subject to change without notice.